REVISION RECORD			
REV.	CONTENT	MOD.	DATE
A	初版发行		

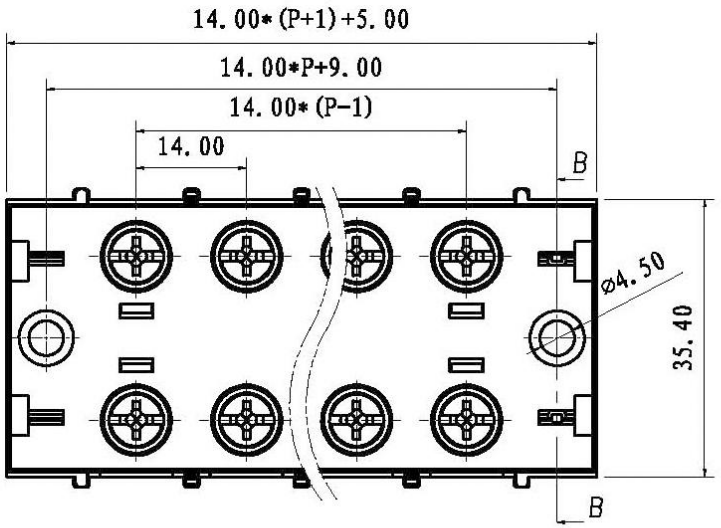

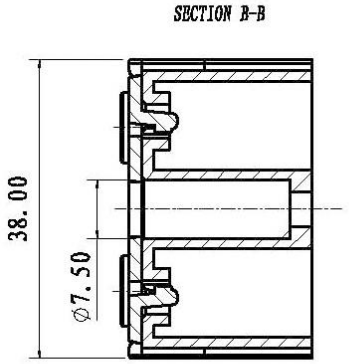

技术要求:

额定电压: 600V

额定电流: 45A

螺钉类型/扭力: M5/2.0 N.m

绝缘材料类型: PC

阻燃等级: V1

导线截面: 6mm² max

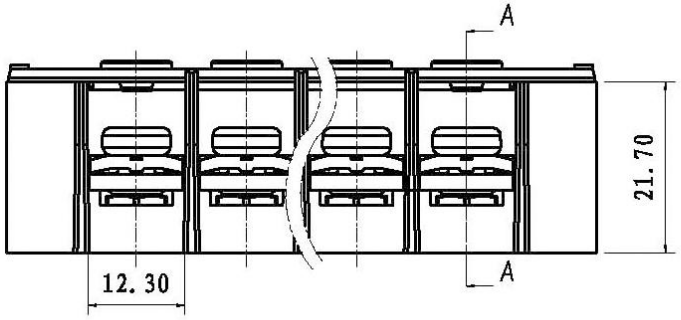

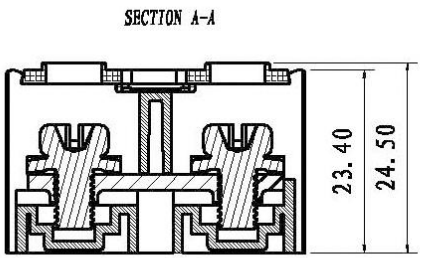

	pitch dimension			Naminal dimension					
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	— / ▱ / ⌒
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	M5*10-12*12螺丝	SPFSA501091V	2P	碳钢	三价铬钝化彩锌
3	TA-40A-导电件	60TABDD040AV	P	黄铜	镀镍
2	TB1-45A-透明盖	6TB1C700450V	1	PC	透明
1	TB1-45A-本体	6TB1C700450V	1	PC	黑色

DES.	ZSH	DATE	2016/03/10	UNITS	mm	THIRD ANGLE PROJECTION	SHEET 1 of 1
CHK.		DATE		SIZE	A4		
APP.		DATE		SCALE	1:1	DWG NO. SP-2-6TB45A1	REV: V0

上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD

TITLE: TB1-45XX-130-00A
TB1-45A-成品